



Type	Outside	Centerline	Slat	Frame
I 200-200	4'-9" (1450)	3'-11" (1200)	8" (200)	11" (280)
I 600-200	6'-3" (1900)	5'-3" (1600)	8" (200)	11" (280)
I 200-300	5'-3" (1600)	3'-11" (1200)	12" (300)	1'-3" (380)
I 300-400	5'-11" (1800)	4'-3" (1300)	16" (400)	1'-7" (480)
I 500-400	6'-7" (2200)	4'-11" (1500)	16" (400)	1'-7" (480)
I 800-400	7'-7" (2300)	5'-11" (1800)	16" (400)	1'-7" (480)
I 600-500	7'-3" (2200)	5'-3" (1600)	20" (500)	1'-11" (590)
I 700-600	7'-11" (2400)	5'-7" (1700)	24" (600)	2'-3" (680)
I 800-650	8'-6" (2600)	5'-11" (1800)	26" (650)	2'-5" (740)
High Capacity				
I 700-400-HC	7'-3" (2200)	5'-7" (1700)	16" (400)	1'-7" (480)
I 700-600-HC	7'-11" (2400)	5'-7" (1700)	24" (600)	2'-3" (680)
Mass Flow				
I 900-300	7'-7" (2300)	6'-3" (1900)	12" (300)	-
I 900-400	7'-11" (2400)	6'-3" (1900)	16" (400)	-
I 2300-500	9'-6" (2900)	7'-7" (2300)	20" (500)	-
Dual Track				
I 200-200/1800-200	6'-11" (2100)	5'-11" (1800)	8" (200)	-
I 200-300/2000-300	7'-11" (2400)	6'-6" (2000)	12" (300)	-
I 300-400/2300-400	9'-3" (2800)	7'-7" (2300)	16" (400)	-
I 600-500/2800-500	11'-2" (3400)	9'-2" (2800)	20" (500)	-

Ryson Spiral Model Naming Key

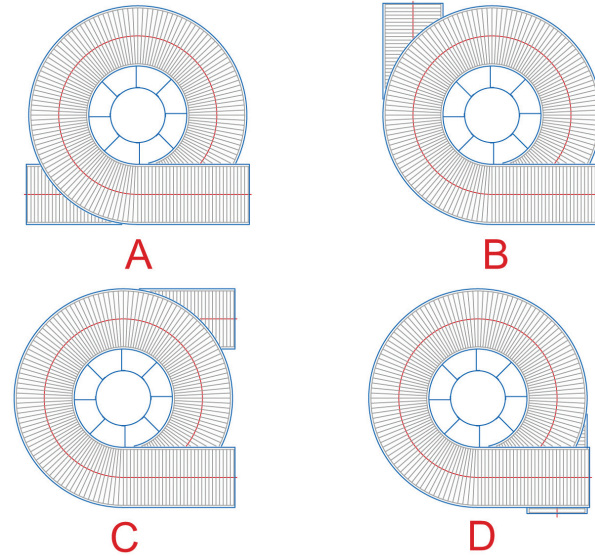

- 1 Elevate Clockwise**
- 2 Descend Clockwise**
- 3 Elevate Counter Clockwise**
- 4 Descend Counter Clockwise**

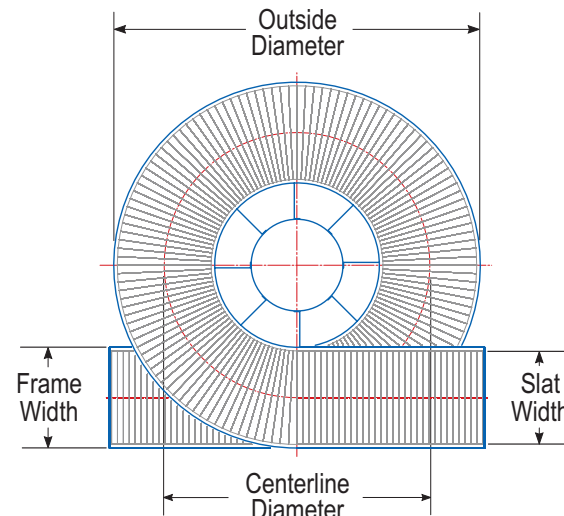

A-EX

B-MA

C-EX

The position and length of the in feed tangent on up spirals and out feed tangent on down spirals can be customized to meet specific layout requirements. Samples are shown above

NOTE: CAD blocks use metric units. They need to be scaled 1/25.4 for inches.

[Click here to go directly to Ryson's RFQ page.](#)



www.ryson.com