


# Request for Quotation

Fax to 757.898.1580 or Email [obranigan@ryson.com](mailto:obranigan@ryson.com)

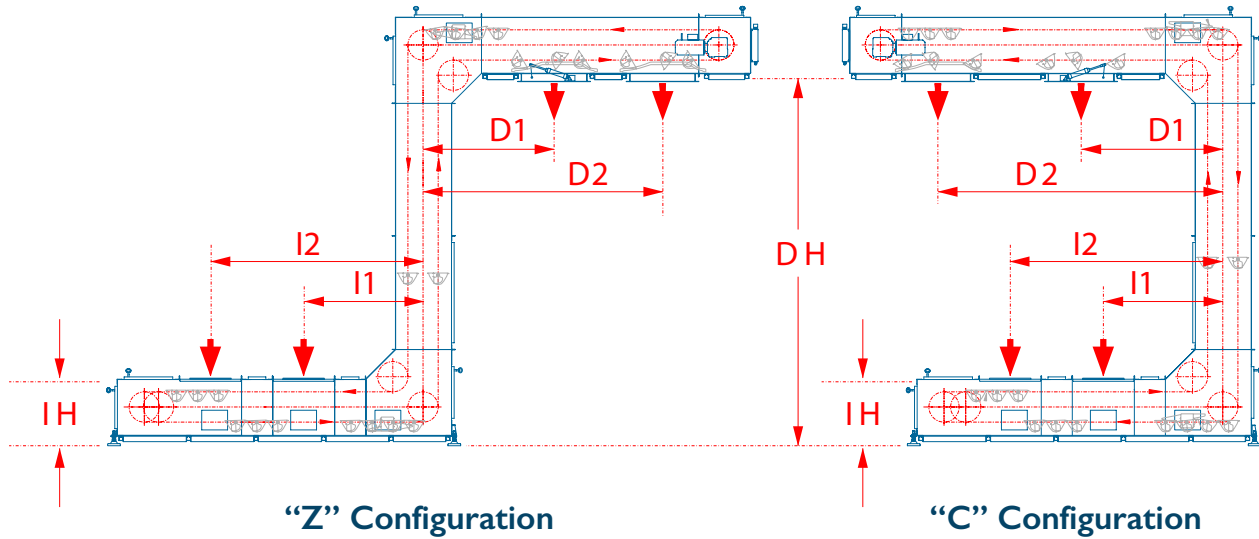

## Contact Information

Name: \_\_\_\_\_ Company: \_\_\_\_\_  
 Address: \_\_\_\_\_ Email: \_\_\_\_\_  
 Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

## Product Information

Product to be Transported: \_\_\_\_\_  
 Product Moisture Percent: \_\_\_\_\_ Temperature of Product: \_\_\_\_\_

## Volume & Capacity Requirements

Product Density: \_\_\_\_\_ Capacity: \_\_\_\_\_ Required Volume: \_\_\_\_\_  
(lbs/ft<sup>3</sup>) (lbs/hr) (ft<sup>3</sup>/hr)

## Conveying Requirements (see drawing for legend)

Configuration  Z  C  Other Infeed Height (IH): \_\_\_\_\_ Discharge Height (DH): \_\_\_\_\_  
 I1 Dimension: \_\_\_\_\_ I2 Dimension: \_\_\_\_\_ I3 Dimension: \_\_\_\_\_  
 D1 Dimension: \_\_\_\_\_ D2 Dimension: \_\_\_\_\_ D3 Dimension: \_\_\_\_\_

If additional Infeed or Outfeed stations are needed, please describe here:

\_\_\_\_\_

## Bucket Elevator Requirements

How many Bucket Elevators needed: \_\_\_\_\_ Date of delivery Preference: \_\_\_\_\_  
 Finish:  Powder Coated  Stainless Steel RAL color Preference: \_\_\_\_\_  
 Options:  Stainless Steel Buckets  Dust Tight Enclosures Power Supply: \_\_\_\_\_  
(Volts / Phases)

## Environmental Considerations

Facility Operating Temperature: \_\_\_\_\_ Facility Humidity: \_\_\_\_\_

Additional Information / Requests: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Ryson International, Inc. • 300 Newsome Drive • Yorktown, VA 23692  
 Phone: (757) 898-1530 • Fax: (757) 898-1580 • [www.ryson.com](http://www.ryson.com)

**RYSON**  
 VERTICAL CONVEYING SOLUTIONS  
 A MEMBER OF ROYAL APOLLO GROUP