



Request for Quotation

Fill out this form and email sales@ryson.com. You can also [fill out this RFQ online](#).



Requested By:

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Email: _____ Phone: _____


Reference Information: _____

New to Ryson: Y N Integrator End User


End user (if applicable): _____

Ship to Address: _____


City: _____ State: _____ Zip: _____




Config A-1
Elevate
Clockwise




Config A-2
Descend
Clockwise




Config A-3
Elevate
Counter-
Clockwise




Config A-4
Descend
Counter-
Clockwise




Config B-1
Elevate
Clockwise




Config B-2
Descend
Clockwise




Config B-3
Elevate
Counter-
Clockwise




Config B-4
Descend
Counter-
Clockwise




Config C-1
Elevate
Clockwise




Config C-2
Descend
Clockwise




Config C-3
Elevate
Counter-
Clockwise




Config C-4
Descend
Counter-
Clockwise




Config D-1
Elevate
Clockwise



Config D-2
Descend
Clockwise



Config D-3
Elevate
Counter-
Clockwise



Config D-4
Descend
Counter-
Clockwise

Product to be Handled: _____

Length: _____ Min. _____ Max.

Width: _____ Min. _____ Max.

Height: _____ Min. _____ Max.

Weight: _____ Min. _____ Max.

Flaps: Open Closed

Infeed Height: _____

Outfeed Height: _____

Elevation Change: _____

Direction: Up Down

Configuration (left chart) _____

Products/Minute: _____

Conveyor Speed: _____

Ambient Temperature: _____

Product Temperature: (if not ambient) _____

Power Supply: _____

Controls Voltage: _____

Width (BF) of Infeed Conveyor: _____

Width (BF) of Outfeed Conveyor: _____


Finish/Color: _____

Seismic Requirements? _____

Special Requests: _____



Ryson Spiral Model Naming Key

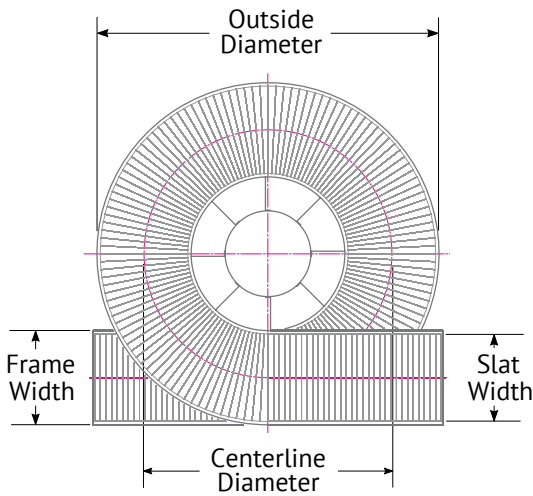


- 1 Elevate Clockwise
- 2 Descend Clockwise
- 3 Elevate Counter Clockwise
- 4 Descend Counter Clockwise

Model	Outside Diameter	Centerline Diameter	Slat Width	Frame Width
1100-150-NT	4'-2" (1270)	3'-8" (1100)	6" (150)	6" (160)
1200-230-NT	4'-9" (1450)	3'-11" (1200)	9" (230)	9" (240)
1200-300	5'-3" (1600)	3'-11" (1200)	12" (300)	15" (380)
1300-400	5'-11" (1800)	4'-3" (1300)	16" (400)	19" (480)
1500-400	6'-7" (2200)	4'-11" (1500)	16" (400)	19" (480)
1800-400	7'-7" (2300)	5'-11" (1800)	16" (400)	19" (480)
1600-500	7'-3" (2200)	5'-3" (1600)	20" (500)	23" (590)
1700-150-NT	6'-2" (1870)	5'-7" (1700)	6" (150)	6" (160)
1700-600	7'-11" (2400)	5'-7" (1700)	24" (600)	27" (680)
1800-650	8'-5" (2590)	5'-11" (1800)	26" (650)	29" (740)
High Capacity				
1700-400-HC	7'-3" (2200)	5'-7" (1700)	16" (400)	19" (480)
1700-600-HC	7'-11" (2400)	5'-7" (1700)	24" (600)	27" (680)
2200-760-WT	10'-0" (3050)	7'-3" (2200)	30" (760)	33" (830)
3000-900-WT	13'-0" (3970)	9'-10" (3000)	36" (900)	38" (970)
Mass Flow				
1900-260-MF	7'-5" (2260)	6'-3" (1900)	10" (254)	10" (254)
1900-400-MF	7'-11" (2400)	6'-3" (1900)	16" (400)	16" (400)
2300-500-MF	9'-4" (2840)	7'-7" (2300)	20" (500)	20" (500)
Dual Track				
1200-300/2000-300	7'-11" (2400)	6'-6" (2000)	12" (300)	-
1300-400/2300-400	9'-3" (2800)	7'-7" (2300)	16" (400)	-

NOTE: CAD blocks use metric units. They need to be scaled 1/25.4 for inches.

Chart displays the most common models.

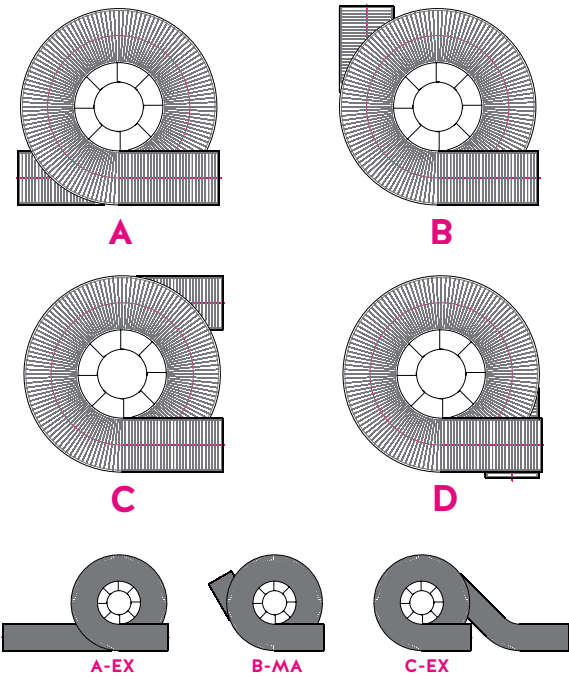

Examples of custom/extended tangents

The position and length of the in feed tangent on up spirals and out feed tangent on down spirals can be customized to meet specific layout requirements. Samples are shown above.



Scan this Code to find our Product Literature

